INSTALLATION INSTRUCTION FOR 4362-281

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER

READ AND SAVE THESE INSTRUCTIONS

PREPARATION

1. Shut off power at the fuse box or circuit breaker box. If necessary. Remove old fixture and all mounting hardware from wall junction box.
2. Carefully unpack your new fixture and lay out all the parts on a clear area. Take care not to loose any small parts necessary for installation.

ASSEMBLING THE FIXTURE

3. Thread pipe (K) into the coupling (L), thread pipe (J) into pipe (K), thread pipe (I) into pipe (J), thread the pipe (H) onto the nipple (I). thread the pipe (G) onto the nipple (H)
4. Thread the pipe (G) onto the coupling (F).

MOUNTING THE FIXTURE (FIG.1)

5. Thread the two mounting screws (A) part way into the mounting bar (B). Secure the mounting bar (B) to junction box (not provided) with the junction box screws (C) through slotted holes in mounting bar (B).

CONNECTING THE WIRES (Fig. 2)

6. Connect the fixture wires to the junction box wires as shown in Fig. 2. Make sure all wire connectors are secure and do not easily pull off with a slight tug. If there is no Green Ground Wire from the junction box, connect the Fixture Ground Wire to the Circular Strap or the Mounting bar with the Green Screw provided.
7. Tuck these wire connections neatly into the wall junction box.
8. Raise the canopy (D) allowing for the mounting screws (A) to protrude through the holes on the canopy (D), then secure with the finials (E).
9. Attach the connection parts (O)to lamp body (M) by finial (N). And then attach the lamp shade (Q) to lamp body (M) by finial (R).

COMPLETING THE INSTALLATION

10. Install the proper light bulbs for your fixture.
    DO NOT EXCEED THE SPECIFIED WATTAGE!
11. Place the plastic washers (U) Glass diffuser (T) plastic washers (S) to the nipples of the "U" shape steel pipe (V), and then move the "U" shape steel pipe (V).Into the joint (P) of the connection parts (O), screw the joint (P) until the glass diffuser attached onto the connection parts firmly

Return the power to the junction box and test the fixture. Your installation is now complete.

FiG.1

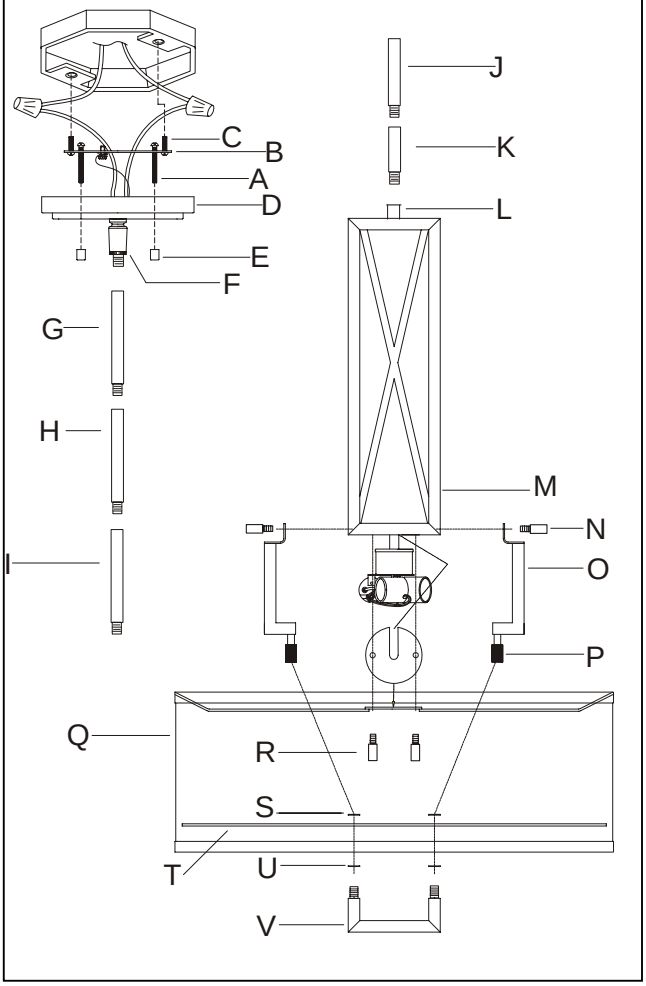

Fig.2

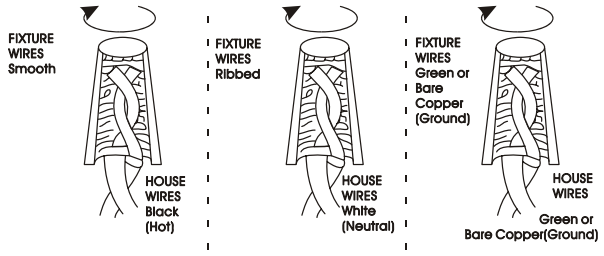

© Minka Lighting, Inc.
This product is protected by United States Federal and/or State Law, including Patent and/or Copyright laws.